




# Industrial Computing

260 Bear Hill Road • Waltham, Massachusetts 02451  
 Tel. (781) 890-3111 • Fax: (781) 890-7117  
 www.industcomputing.com

## FP-AM 12 12" TFT LCD Color Monitor



FP-AM12			
Viewing Area	12.1"		
Touch Panel	NO	YES(ELO)	NO
Strengthen Glass	NO	NO	YES
Pixel Pitch	0.3075 X 0.3075 mm		
Resolution	800 X 600 SVGA		
Effective Display Area	246.0 X 184.5mm		
Color	262,144		
Response Time(tr/TF)	30/20ms		
Contrast Ratio	300:1		
Brightness	340 cd/m2		
View Angle	T:20° B:40° L:50° R:50°		
Backlight	2 CCFL		
Lamp Life	50000 hrs		
Input Signal	Analog VGA & Video (Composite Video System PAL/NTSC/SECAM)		
Input Connector	D-Sub 15Pin, BNC Jack, S-VHS Din Type		
Scan Frequency	H: 31.5~53KHz / V: 56~85Hz		
Control	OSD		
Power Adaptor Input & Output	Universal AC 100~240 V, 50/60Hz & DC12V		
Power Input	DC 12V, 20~36V / 2A		
Power Management	VESA DPMS Standard		
Consumption	25W / Stand by 2.5 w		
Operating Temperature/Humidity	0 ~ 50°C / 10 ~ 85%RH		
Storage Temperature/Humidity	-20 ~ 60°C / 10 ~ 90%RH		
Sync Signal	TTL Level +/- Polarity		
Scanning	Non-Interlace		
Dimension (mm) (WxHxD)	330 x 239 x 71		
Net Weight (Kg)	3.2	3.6	
Safety & EMI	CE (EMC+LVD)		
Vibration	10Hz / One-way 1m/m		
Pixel (MHz)	56.25 MHz		
Content	LCD Monitor, Key Pad, Power Adaptor, VGA Cable		

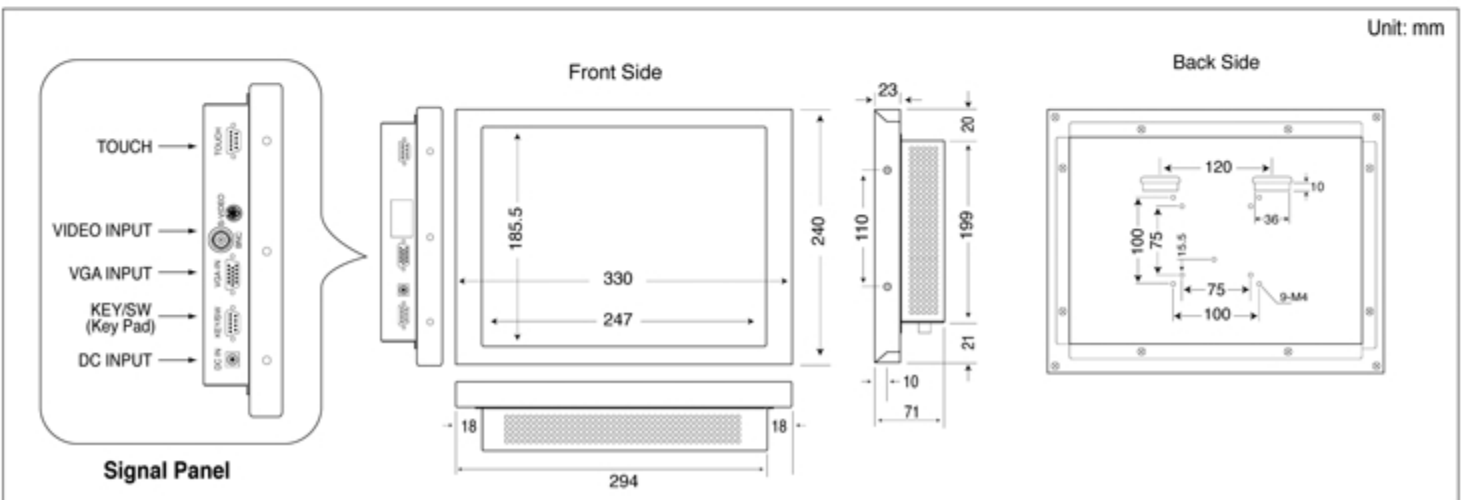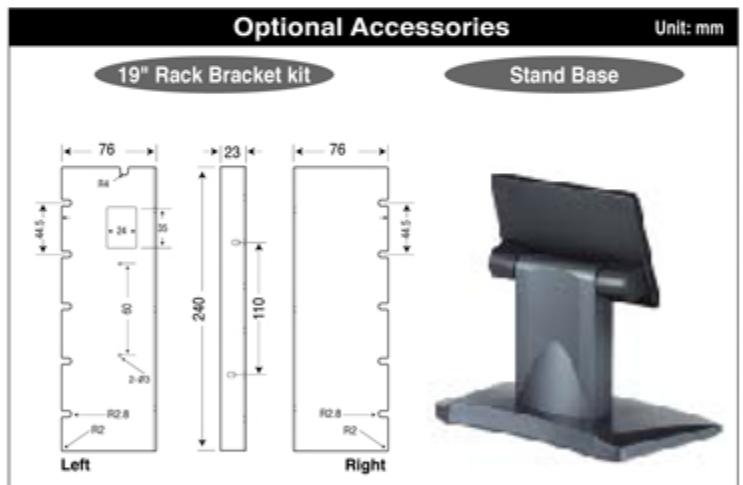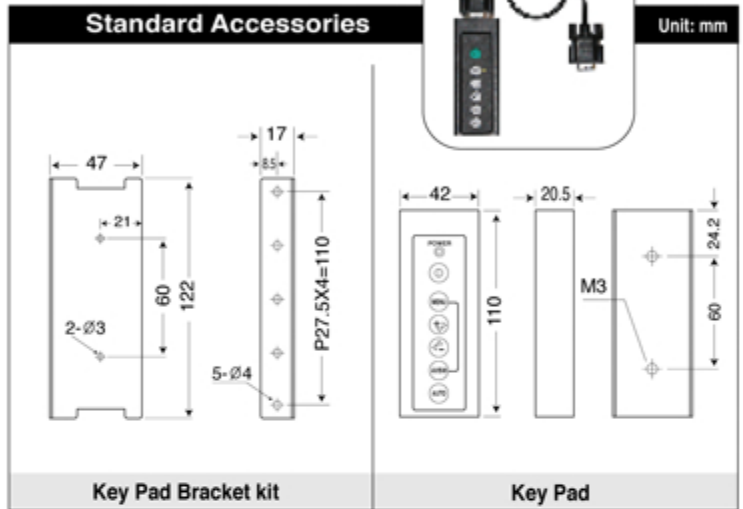

Specification subject to change without notice.